


Wall mounted receptacle - Part no. 139


- screw terminals
- products with pilot contact: part no. + index P

| | |
|-----------------------|-----------------|
| Protection type | IP 67 |
| Ampere | 125 A |
| Poles | 4p |
| Voltage | 400 V |
| Hertz | 50-60Hz |
| Earth position | 6h |
| Contact | standard |
| Connection technology | Screw terminals |

Std. Pack. 3 Qty.

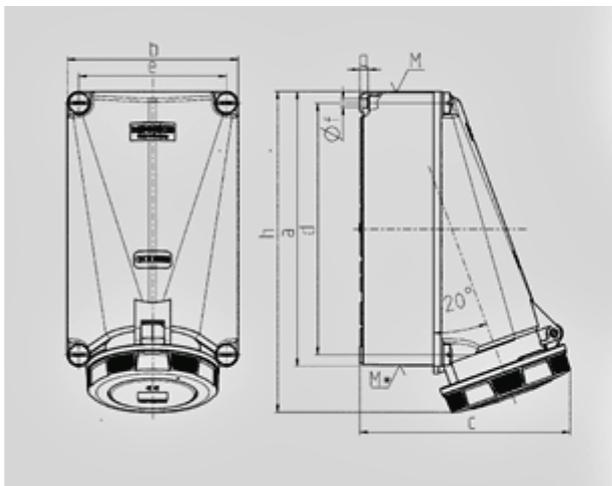

| Drawing | Amp. | 125 | |
|---|-----------------------|------|------|
| | | 4 | 5 |
| 1 MB 162 | Poles | | |
| Dim. in mm | a | 264 | 264 |
| | b | 163 | 163 |
| | c | 200 | 200 |
| | d | 240 | 240 |
| | e | 140 | 140 |
| | f | 8,1 | 8,1 |
| | g | 8 | 8 |
| | h | 306 | 306 |
| | M | 50 | 50 |
| | M* | 2x50 | 2x50 |
| | Max. cable diam. (mm) | | 38 |
| Terminal for cond. cross section (mm ²) min.-max. | | 25 | 25 |
| | | -35 | -35 |