


## Connector PowerTOP® Xtra - Part no. 14219



- screw terminals
- with rubberised grip area
- frame terminals
- TorsionSpringCONTACT
- cable gland and sealing
- strain relief and protection against kinking
- enclosure with thread lock
- two safety slides
- products with pilot contact on request

### Technical information

|                       |                                       |
|-----------------------|---------------------------------------|
| Ampere                | 125 A                                 |
| Poles                 | 4 p                                   |
| Voltage               | 400V                                  |
| Earth position        | 6 h                                   |
| Hertz                 | 50-60 Hz                              |
| Connection technology | Screw terminals, TorsionSpringCONTACT |
| Contact               | highly heat resistant contact carrier |
| Protection type       | IP 67                                 |

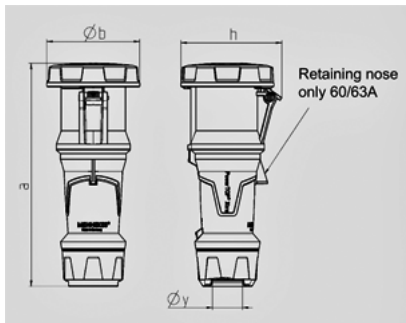

| Drawing<br>3 MB 68       | Amp.<br>Poles | 63  |     |     | 125 |     |     |
|--------------------------|---------------|-----|-----|-----|-----|-----|-----|
|                          |               | 3   | 4   | 5   | 3   | 4   | 5   |
| Dim. in mm               | a             | 270 | 270 | 270 | 310 | 310 | 310 |
|                          | b             | 113 | 113 | 113 | 125 | 125 | 125 |
|                          | h             | 123 | 123 | 123 | 135 | 135 | 135 |
|                          | y             | 36  | 36  | 36  | 49  | 49  | 49  |
| Terminal for cond. cross |               | 6   | 6   | 6   | 25  | 25  | 25  |
| section (mm²) min.-max.  |               | —16 | —16 | —16 | —50 | —50 | —50 |